











Ledline LAVAGNE LED

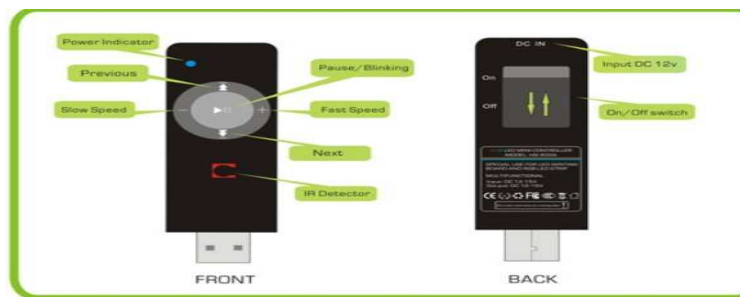
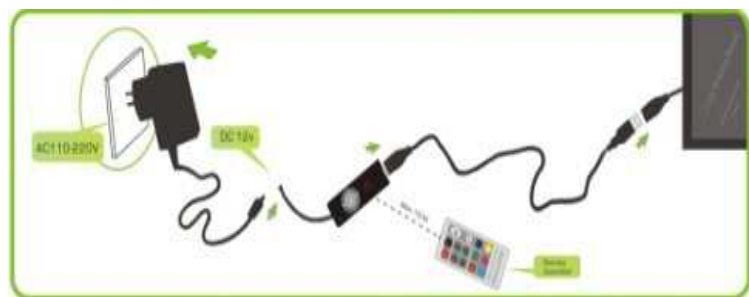


No.	Picture	Order Code	Size (mm) H x L	Frame	Product Specifications	Net Weight	Color light
1		L001	600x470x20 mm	Brown Wood	Remote LED Sign board Directly remote function 24key remote	2Kg	RGB
2		L002	260x220mm	Black Silver	Portable T Series Black & Silver Aluminium Frame Transparance Writing area With self stand, and hung stuff Function work with USB controller	/	RGB
2A		L003	450x260mm	Black/Silver		/	RGB
2B		L004	450x340mm	Black/Silver		/	RGB
3		L005	290x240x15 mm	Black Silver	Aluminum frame board *Black / silver/ aluminium frame 2 color for choose * Fixed Black background * High-hardness writing area-hard coated PMMA acrylic. Anti-scratch and crystal transparence.	0,9Kg	RGB
4		L006	470x360x15 mm	Black Silver	* Super thin (1.5cm) and ultra-light frame board * Light source: High-brightness RGB I FD 7color 5050MDI FD	1,64Kg	RGB

5		L007	600x470x15 mm	Black Silver	<p>LED 7 color 5050MDLED</p> <ul style="list-style-type: none"> * Input DC12V~15V * 7 colors RGB LED's * many type of flashing model * 8 kinds of flash speed.can be adjusted by a button. * Combination 7 colors twinkle in waves sequential from red-pink-deep blue-light blue-green-yellow-white. * Each color can flashing and steady on separately by controller 	2,65Kg	RGB
6		L008	700x600x15 mm	Black Silver		3,85Kg	RGB
7		L009	470x360x22 mm	Black Redwood	<p>W series - Wood imitation frame Board</p> <ul style="list-style-type: none"> * Wood imitation frame, color: Black bottom + Silver decorative and Red wood bottom + Golden decorative. 2 for choose * Fixed Black background * High-hardness screen-hard-coated PMMA acrylic. Anti-scratch and high transperance. * Super thin (2.2cm) * Light source: High-brightness RGB LED (7color 5050MDLED) * Input DC12V~15V * 7 colors RGB LED's * 8 kinds of flash speed. can be adjusted by a button. 	1,7Kg	
8		L010	600x470x22 mm	Black Redwood		2,6Kg	
9		L011	700x600x22 mm	Black Redwood	3,8Kg		
10		L012	600x470x15 mm	Black Silver	<p>T Series - Transperance Board</p> <ul style="list-style-type: none"> * Transparent writing area with aluminium alloy frame * Same function with Regular series and W series 	1,9Kg	
10A		L013	700x600x15 mm			2,3Kg	



11		L014	470x360x15 mm	Black Silver	M Series - Multifunctional Board * Black Background is removable with aluminium alloy frame. You can insert poster paper freely. * Rainproof optional. * Same function with Regular series and W series	1,3Kg	
Accessori Extra							
12		LA001			Fluorescent Marker Pen-4.5mm Nib. 8g Ink * High Brightness neon color/ Easy wipe off * 4.5mm bullet / chisel nib * 8g ink * Dry-wipe		
13		LA002			Fluorescent Marker Pen-10mm Nib.15g Ink * High Brightness neon color /Easy wipe off * 10mm chisel nib * 15g ink * Dry-wipe		
14		LA003			14key Remote Controller. * Adpot IR remote control, single keypad easy to operate * Memory function no need re-set * 14key 14kinds of function * Remote distance: within 10meter		
15		LA004			24key Remote Controller. Can only operate by remote * Adpot IR remote control, single keypad easy to operate * memory function no need re-set of cut power * 24key 24kinds of function * Remote distance: within 10meter		
16		LA005			4 Meter extension cord with USB interface *Quality guarantee *USB interface		

Incluso con lavagna LED:
 Adattatore corrente
 Pennarello Bianco
 USB
 Controller
 Panno per pulire la lavagna



Ledline Croci LED per farmacie

No.	Picture	Order Code	item no.	Voltage, Wattage	Size (mm)	Pitch(mm)	IP	LED (pcs)	Color light
12		CR001	60 Cross(SH-60CROSS)	220V AC, 130W	63×93×10cm	12,5mm	IP65	2560	Green or Blue
13		CR002	80 Cross (SH-80CROSS)	220V AC, 130W	80×112×10cm	16mm	IP65	2560	Pure Green or Blue

14		CR003	80 Cross Full Color	220V AC, 200W	80×112×13cm	16mm	IP65	7680	Full color
15		CR004	100 Cross (SH-100CROSS)	220V AC, 130W	99×99×10cm	20mm	IP65	2560	Green and Red

Croci LED

- 1)Can display current temperature(Celsius degree, format: 27°C), time(format: 24hour), date(format:dd/mm), humidity(format:%), graphics(format: jpg, bmp), animations and texts.
- 2)Operating software supports Windows Vista/XP/2000/98/2007. English and French and Italian version software are available
- 3)User-friendly operating software allows user to realize lots of functions via RF wireless control and communication.
- 4)Cross turns/off function is very easy and convenient. User can pre-set time of turn / off for the whole week.
- 5)* Cross working environment: -15°C to +60°C, 10% to 90%RH.